


# SC-A515

## Climbing

### INFORMATION ABOUT PRODUCT

Minimum Space	821x738x430 cm
Impact Protection net	45,30 m <sup>2</sup>
Dimensions	402x388 cm
Overall Height	308 cm
Free falling height	250 cm
Foundations	11 pcs
Availability of spare parts	YES
Product complies with EN 1176	YES
Age range	6-14
Amount of users	8

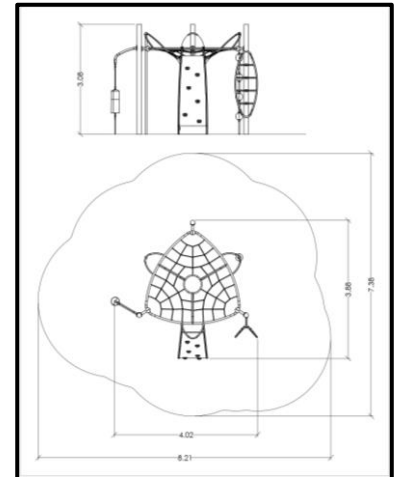

### MATERIALS

- Steel structure with three pre-galvanized (outside & inside) and powder coated posts Ø127mm (t=3,2mm).
- Posts have plastic top in which there are LED lights. \*\*
- Supplementary Circular Cross sections: Ø33,7mm(t=3,2mm)/ Ø42,4mm (t=3,2mm)/ Ø60,3mm (t=3,2mm)
- Panels: HPL 12mm (EXT) and/or HDPE 15mm
- Metal Parts (colored): Cleaning process applied as the first step of the coating process. Zinc substrate. Zinc is applied to raw steel material. Heating cured premium polyester coating treatment applied as top finish.
- Metal Parts (non - colored): Hot Dip Galvanized (plain) or Stainless Steel (304 / 316L)
- Steel Ropes apparatus: Steel core ropes braided with polypropylene (Ø16mm). Solid and aesthetic connectors made of injection molded durable plastic / end-connectors and sleeves made of durable aluminum alloy.
- Punch bag: polyurethane foam
- All other plastic elements: Fiber reinforced plastic
- Fasteners: Electroplated coated or Stainless Steel (304 / 316L)
- Chains: Hot Dip Galvanized (plain) or Stainless Steel (304 / 316L) / Ø6mm / According to DIN 766
- Anchors: Hot Dip Galvanized steel



\*\*LED colored lights that automatically change are not included

**Please note that the above list of materials concerns the articles of the whole series. Therefore, some of them are not used in the described article.**